




S5Q-PA, S8Q-PA, VH200, VH410 & VH410M

Ultraviolet Water Disinfection Systems from VIQUA

The quality of drinking water can change with time and become contaminated with harmful bacteria. The VIQUA **HOME family** of compact UV disinfection systems provide a **reliable, economical,** and **chemical-free** way to safeguard drinking water in any residential application. VIQUA's range of products have been designed and tested to ensure quality drinking water is at everyone's finger tips.

Regardless of your need, there is a VIQUA system to suit your requirements. VIQUA offers systems that range in flow rates from just 6 GPM for a small home or cottage, up to 18 GPM for a larger home or small business.

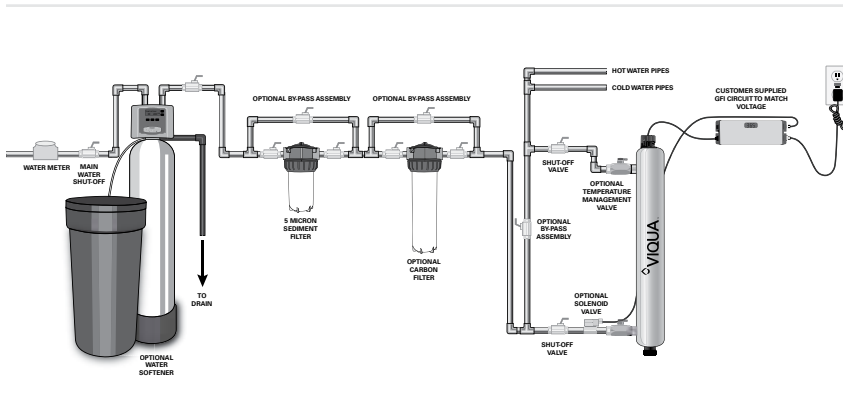

Features of VIQUA UV water disinfection systems

- Equipped to inactivate chlorine-resistant parasites such as **Cryptosporidium** and **Giardia**, harmful bacteria like **E. Coli**, and viruses not visible to the naked eye.
- Specially designed and tested Sterilume™-EX and -HO lamps provide **consistent and reliable** ultraviolet output over the entire life of the lamp (9000 hours) to ensure continuous purification.
- The system is simple to maintain and service allowing for easy lamp replacement.
- Built with a **durable stainless steel chamber** to prolong life and eliminate ultraviolet light degradation.
- Safety-Loc™ connector with interlock that ensures power is disconnected before lamp can be removed.
- The controller visually displays the remaining lamp life and will go into alarm if the lamp fails. Monitored systems are equipped with a UV sensor which provides a continuous readout of UV intensity.
- Monitored systems allow for the installation of an optional solenoid valve which will stop the flow of water through the chamber should the UV performance fall below a safe level.

Specifications



MODEL	S5Q-PA	S8Q-PA	VH200	VH410	VH410M
-------	--------	--------	-------	-------	--------

FLOW RATES @ 95% UVT

US Public Health (16 mJ/cm ²)	11 GPM (42 lpm) (2.5 m ³ /hr)	19 GPM (72 lpm) (4.3 m ³ /hr)	16 GPM (60 lpm) (3.6 m ³ /hr)	34 GPM (130 lpm) (7.8 m ³ /hr)	34 GPM (130 lpm) (7.8 m ³ /hr)
VIQUA Standard (30 mJ/cm ²)	6 GPM (23 lpm) (1.4 m ³ /hr)	10 GPM (38 lpm) (2.3 m ³ /hr)	9 GPM (34 lpm) (2.0 m ³ /hr)	18 GPM (70 lpm) (4.2 m ³ /hr)	18 GPM (70 lpm) (4.2 m ³ /hr)
NSF/EPA (40 mJ/cm ²)	4.5 GPM (17 lpm) (1.0 m ³ /hr)	8 GPM (29 lpm) (1.8 m ³ /hr)	7 GPM (26 lpm) (1.6 m ³ /hr)	14 GPM (54 lpm) (3.3 m ³ /hr)	14 GPM (54 lpm) (3.3 m ³ /hr)

DIMENSIONS

Chamber	22" x 2.5" (56.1 cm x 6.5 cm)	35.5" x 2.5" (90.4 cm x 6.5 cm)	17.75" x 3.5" (45 cm x 8.9 cm)	23.5" x 3.5" (59.6 cm x 8.9 cm)	23.5" x 3.5" (59.6 cm x 8.9 cm)
Controller	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)	9.25" x 3.25" x 2.5" (24 cm x 8.1 cm x 6.9 cm)
Inlet/Outlet Port Size	3/4" MNPT*	3/4" MNPT*	3/4" - 1" MNPT COMBO*	3/4" - 1" MNPT COMBO*	3/4" - 1" MNPT COMBO*
Shipping Weight	8 lbs (3.6 kg)	11 lbs (5 kg)	12 lbs (5.4 kg)	17 lbs (7.7 kg)	17 lbs (7.7 kg)

ELECTRICAL

Voltage	100-240V / 50/60 Hz	100-240V / 50/60 Hz	100-240V / 50/60 Hz	100-240V / 50/60 Hz	100-240V / 50/60 Hz
Power Consumption	30 W	46 W	35 W	60 W	60 W
Maximum Operating Pressure	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)
Influent Water Temperature	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)

FEATURES

Visual "Power On"	YES	YES	YES	YES	YES
Chamber Material	304 SS	304 SS	304 SS	304 SS	304 SS
Visual Lamp Life Remaining	YES	YES	YES	YES	YES
Audible Lamp Life Failure	YES	YES	YES	YES	YES
Audible Lamp Replacement Reminder	YES	YES	YES	YES	YES
UV Sensor	NO	NO	NO	NO	YES

* /2B - BSP


Replacement Parts

S463RL – UV lamp for S5Q-PA	QS-463 – quartz sleeve for S5Q-PA
S810RL – UV lamp for S8Q-PA	QS-810 – quartz sleeve for S8Q-PA
S200RL-HO – UV lamp for VH200	QS-001 – quartz sleeve for VH200
S410RL-HO – UV lamp for VH410 & VH410M	QSO-410 – quartz sleeve for VH410 & VH410M
QL-200 – quartz sleeve, UV lamp combo pack for VH200	410867 – o-ring for quartz sleeves
QL-410 – quartz sleeve, UV lamp combo pack for VH410 & VH410M	RN-001 – retaining nut for all systems
S463-QL – quartz sleeve, UV lamp combo pack for S5Q-PA	RN-001/1 – retaining nut with plug for all systems
S810-QL – quartz sleeve, UV lamp combo pack for S8Q-PA	BA-ICE-S – electronic ICE controller for S5Q-PA and S8Q-PA
BA-ICE-CM – electronic ICE controller for VH410M	BA-ICE-CL – electronic ICE controller for VH200, VH410

Water Quality Parameters

Hardness < 7 grains (120 mg/L)	Iron < 0.3 mg/L	Tannins < 0.1 mg/L
--	---------------------------	------------------------------

S5Q-PA, S8Q-PA, VH200, VH410, & VH410M DOSE CURVES

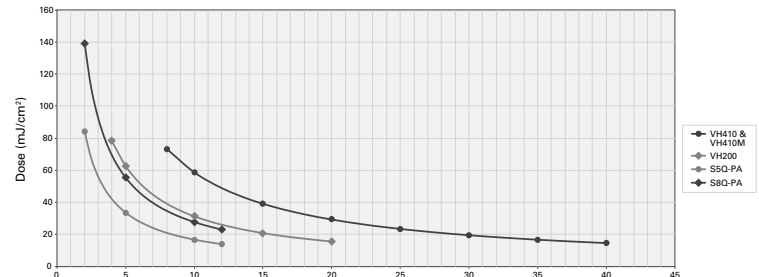

425 Clair Rd. W, Guelph, Ontario, Canada N1L 1R1
 t. 1.519.763.1032 • f. 1.519.763.5069 • tf. 1.800.265.7246 (US/CAN)
 t. +31.73.747.0144 (EUR) info@viqua.com • www.viqua.com

LIT-520329-R_RevD © 2018 VIQUA - a Division of Trojan Technologies Group ULC

